


REV	DESCRIPTION	MARK
X1	first edition	

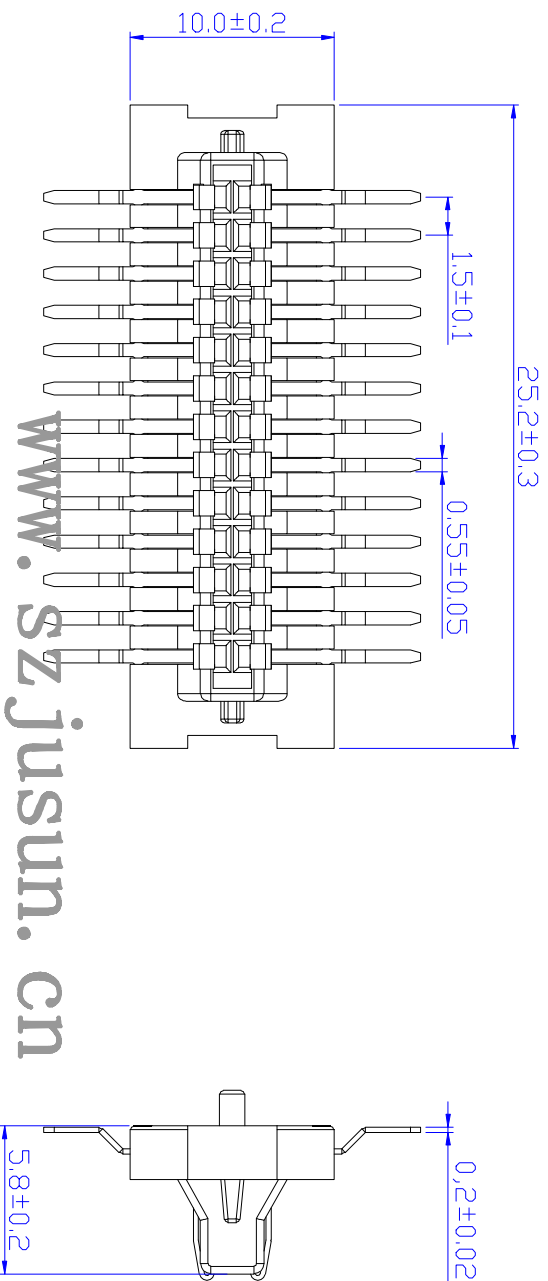


www.szjusun.cn

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1Minute;
Contact resistance: 60mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25°C~+85°C;

MATERIAL:

Housing: Nylon46, UL94V-0,
Pin: Phosphor Bronze Gold-plated;

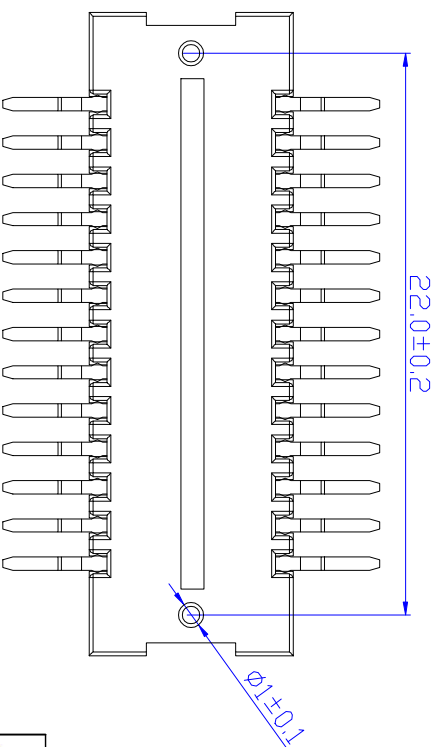

 鉅賽实业(深圳)有限公司 JUSUN JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: SB2600A	
X. ± X ± 0.20 .XX ± 0.10 .XXX ± 0.05		X.° ± X.° ± 0.1° .XX° ± 0.05° .XXX° ±	
		UNITS: mm	
Q'TY: /		DR:	
DATE 2017.08.20		VERSION V1.0	
SCALE 1:1		SHEET 1/1	
REV. X1		CUS PART NO.:	